



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Rec'd PCT/EP 23 MAR 2005
PCT/EP 03/50646

REC'D 11 DEC 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02102379.1

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

BEST AVAILABLE COPY

R C van Dijk



Anmeldung Nr:
Application no.: 02102379.1
Demande no:

Anmeldetag:
Date of filing: 24.09.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Federal-Mogul S.A.
Avenue Champion
6790 Aubange
BELGIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

A windscreen wiper device

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

B60S1/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

Q.AU44

A WINDSCREEN WIPER DEVICE

5 The present invention relates to a windscreen wiper device comprising an elastic, elongated carrier element, as well as an elongated wiper blade of a flexible material, which can be placed in abutment with a windscreen to be wiped, which wiper blade includes opposing longitudinal grooves on its
10 longitudinal sides, in which grooves spaced-apart longitudinal strips of the carrier element are disposed, wherein neighbouring ends of said longitudinal strips are interconnected by a respective connecting piece, which windscreen wiper device comprises a connecting device for an
15 oscillating arm, wherein said oscillating arm is pivotally connected to said connecting device about a pivot axis near one end, with the interposition of a joint part.

Such a windscreen wiper device is known from German patent
20 publication no. 101 30 903. (Robert Bosch GmbH). This prior art windscreen wiper device is designed as a "yokeless" wiper device, wherein no use is made of several yokes pivotally connected to each other, but wherein the wiper blade is biased by the carrier element, as a result of which it
25 exhibits a specific curvature. This known device has a first coupling half fixed to the oscillating arm, as well as a second coupling half fixed to the wiper blade, wherein two parallel interspaced supporting walls of the second coupling half are oriented in the longitudinal direction of the wiper
30 blade. Each end of a pivot pin for a joint part, which is mounted on the pivot pin in a manner that permits it to swing between the supporting walls and which is provided for connecting the oscillating arm, is held in these supporting

walls. In order to obtain protection against environmental influences such as snow, ice and dust, the oscillating arm is u-shaped in the area of its coupling half, whereby the U-base covers the supporting (protective) walls and both U-limbs
5 cover the outer sides of these supporting walls.

A disadvantage of the windscreen wiper device known from the above-mentioned German patent document is that, due to high forces exerted in practice on the connection between the
10 connecting device and the oscillating arm, the reliability of said connection appears to diminish with the passage of time, resulting in play between the connecting device and the oscillating arm. Such a play in practice has proven to lead to frictional contact between these parts and therefore to
15 wear. A further disadvantage thereof is that many constructional parts are involved in the connection between the connecting device and the oscillating arm, making the known windscreen wiper device laborious to manufacture and therefore relatively costly.

20 The object of the invention is to overcome these drawbacks of the prior art as indicated above, in particular to provide a windscreen wiper device wherein the connecting device and the oscillating arm are interconnected in a simple though durable
25 and solid manner.

In order to accomplish that objective, a windscreen wiper device of the type referred to in the introduction is characterized in that said connecting device is positioned at
30 least substantially within said joint part. Particularly, this enables to attach said joint part to said connecting device by protrusions of said connecting device at the location of said pivot axis, said protrusions pivotally

engaging in recesses provided in said joint part. These protrusions that function as bearing surfaces are spaced far apart, so that the forces exerted on the bearing surfaces will be relatively low. As these protrusions replace the

5 pivot pin as used in the known windscreen wiper device discussed above, less constructional components are used in connecting the connection device and the oscillating arm together.

10 In one preferred embodiment of a windscreen wiper device according to the invention said joint part has an at least substantially U-shaped cross-section at the location of its attachment to said connecting device, wherein said joint part in each leg of said U-shaped cross-section is provided with a

15 recess provided coaxially with said pivot axis. Preferably, the protrusions extend outwards on either side of said connecting device (that is, outwardly in lateral direction with respect to the oscillating arm), wherein the protrusions are at least substantially cylindrical. Particularly, the

20 recesses are correspondingly shaped.

In another preferred embodiment of a windscreen wiper device according to the invention said joint part is made of plastic, which includes any synthetic material having some

25 flexibility.

In another preferred embodiment of a windscreen wiper device according to the invention said joint part comprises at least one resilient tongue engaging in a correspondingly shaped

30 hole provided in said oscillating arm. Preferably, the oscillating arm has an at least substantially U-shaped cross-section at the location of its connection to said joint part,

wherein said hole is provided in a base of said U-shaped cross-section.

In another preferred embodiment of a windscreen wiper device
5 according to the invention said joint part comprises at least two lateral resilient tongues extending outwardly, wherein the oscillating arm has an at least substantially U-shaped cross-section at the location of its connection to said joint part, and wherein each tongue engages in a correspondingly
10 shaped hole provided in a leg of said U-shaped cross-section.

While mounting the oscillating arm onto the connecting device/joint part, the resilient tongue(s) is/are initially pushed in against a spring force and then allowed to spring
15 back into said hole(s), thus snapping, that is clipping the resilient tongue(s) into the hole(s).

In another preferred embodiment of a windscreen wiper device according to the invention said hole(s) has/have a closed
20 circumference. Such (a) closed hole(s) enhance(s) the retention of the oscillating arm onto the connecting device/joint part in all directions, particularly both horizontally and vertically.

25 In another preferred embodiment of a windscreen wiper device according to the invention the oscillating arm has an at least substantially U-shaped cross-section at the location of its connection to said joint part, and wherein each leg comprises clamping members which engage rond longitudinal
30 sides of said joint part that face away from each other. These clamping members being preferably formed as inwardly bended edges integral with the legs of the U-shaped cross-section, serve to further enhance the retention of the

oscillating arm onto the connecting device/joint part in vertical direction, that is perpendicular to the longitudinal direction of the oscillating arm.

5 The invention will now be explained in more detail with reference to figures illustrated in a drawing, wherein:

10 - Figure 1 is a perspective, schematic view of a preferred embodiment of a windscreen device in accordance with the invention;

15 - Figures 2 and 3 show details of the windscreen wiper device of figure 1, wherein various successive steps are shown for fitting an oscillating wiper arm to a connecting device using two different types of joint parts ("spacers"); and

20 - Figure 4 is a perspective and schematic view of an end of an oscillating wiper arm used in figure 3.

Figure 1 shows a preferred variant of a windscreen wiper device 1 according to the invention. Said windscreen wiper device is built up of an elastomeric wiper blade 2, in the longitudinal sides of which opposing longitudinal grooves 3 are formed, and of longitudinal strips 4 made of spring band steel, which are fitted in said longitudinal grooves 3. Said strips 4 form a flexible carrier element for the rubber wiper blade 2, as it were, which is thus biased in a curved position (the curvature in operative position being that of a windscreen to be wiped). Neighbouring ends 5 of strips 4 are interconnected on either side of the windscreen wiper device 1 by means of connecting pieces 6 functioning as clamping members. In this embodiment, the connecting pieces 6 are

separate constructional elements, which may be form-locked ("positive locking" or "having positive fit") as well as force-locked to the ends 5 of strips 4. In another preferred variant, said connecting pieces 6 are in one piece with the strips 4 made of spring band steel. In the latter case said connecting pieces form transverse bridges for the strips 4, as it were.

The windscreen wiper device 1 is furthermore built up of a connecting device 7 of plastic material for an oscillating wiper arm 8. Connecting device 7 comprises clamping members 9 that are integral therewith, which engage round longitudinal sides 10 of the strips 4 that face away from each other, as a result of which the connecting device 7 is firmly attached to the unit consisting of wiper blade 2 and strips 4. The oscillating wiper arm 8 is pivotally connected to the connecting device 7 about a pivot axis near one end, and that in the following manner.

With reference to figure 2 the connecting device 7 comprises two cylindrical protrusions 10 extending outwards on either side of said connecting device 7 (figure 2a). These protrusions 10 pivotally engage in identically shaped cylindrical recesses 11 of a plastic joint part 12 (figure 2b). Said protrusions 10 act as bearing surfaces at the location of a pivot axis in order to pivot the joint part 12 (and the oscillating wiper arm 8 attached thereto) about said pivot axis near one end of said arm 8. The protrusions 10 are preferably in one piece with the connecting device 7; in the alternative, the protrusions 10 are part of a single pivot pin perpendicular to the connecting device 7. Said connecting device 7 may be equipped with a cover or cap in order to obtain an aesthetic appearance thereof, to avoid sharp edges

and to provide protection against UV-light etcetera. The joint part 12 comprises two lateral resilient tongues 13 extending outwardly, while the oscillating arm 8 has a U-shaped cross-section at the location of its connection to said joint part 12, so that each tongue 13 engages in an identically shaped hole 14 provided in a leg 15 of said U-shaped cross-section (figure 2c).

Figures 3a, 3b and 3c correspond to figures 2a, 2b and 2c, respectively, with the difference that one resilient tongue 13 in figure 3 fitting in a hole 14 provided in a base 16 of the U-shaped cross-section (figure 3c).

Referring to both figures 2 and 3, while mounting the oscillating wiper arm 8 onto the connecting device 7/joint part 12, the resilient tongue(s) 13 is/are initially pushed in against a spring force and then allowed to spring back into said hole(s) 14, thus snapping, that is clipping the resilient tongue(s) 13 into the hole(s) 14. This is a so-called bayonet-connection.

Each leg 15 of the U-shaped cross-section comprises clamping members which engage round longitudinal sides of said joint part 12 that face away from each other. In figures 2, 3 and 4 these clamping members are formed as inwardly bended edges 17 integral with the legs 15 of the U-shaped cross-section, serving to further enhance the retention of the oscillating arm 8 onto the connecting device 7/joint part 12 in vertical direction, that is perpendicular to the longitudinal direction of the oscillating wiper arm 8.

Possibly, a spoiler 18 is furthermore provided (figure 1).

The invention is not restricted to the variants shown in the drawing, but it also extends to other embodiments that fall within the scope of the appended claims.

CLAIMS

1. A windscreen wiper device comprising an elastic,
elongated carrier element, as well as an elongated wiper
5 blade of a flexible material, which can be placed in
abutment with a windscreen to be wiped, which wiper blade
includes opposing longitudinal grooves on its
longitudinal sides, in which grooves spaced-apart
longitudinal strips of the carrier element are disposed,
10 wherein neighbouring ends of said longitudinal strips are
interconnected by a respective connecting piece, which
windscreen wiper device comprises a connecting device for
an oscillating arm, wherein said oscillating arm is
pivotally connected to said connecting device about a
15 pivot axis near one end, with the interposition of a
joint part, **characterized in that** said connecting device
is positioned at least substantially within said joint
part.
- 20 2. A windscreen wiper device according to claim 1, wherein
said joint part is attached to said connecting device by
pivotally engaging protrusions of said connecting device
at the location of said pivot axis in recesses provided
in said joint part.
- 25 3. A windscreen wiper device according to claim 2, wherein
said joint part has an at least substantially U-shaped
cross-section at the location of its attachment to said
connecting device, and wherein said joint part in each
30 leg of said U-shaped cross-section is provided with a
recess provided coaxially with said pivot axis.

4. A windscreen wiper device according to claim 2 or 3, wherein the protrusions extend outwards on either side of said connecting device and wherein the protrusions are at least substantially cylindrical.

5

5. A windscreen wiper device according to any of the preceding claims 1 through 4, wherein said joint part is made of plastic.

- 10 6. A windscreen wiper device according to any of the preceding claims 1 through 5, wherein said joint part comprises at least one resilient tongue engaging in a correspondingly shaped hole provided in said oscillating arm.

15

7. A windscreen wiper device according to claim 6, wherein the oscillating arm has an at least substantially U-shaped cross-section at the location of its connection to said joint part, and wherein said hole is provided in a base of said U-shaped cross-section.

20

8. A windscreen wiper device according to claim 6 or 7, wherein said joint part comprises at least two lateral resilient tongues extending outwardly, wherein the oscillating arm has an at least substantially U-shaped cross-section at the location of its connection to said joint part, and wherein each tongue engages in a correspondingly shaped hole provided in a leg of said U-shaped cross-section.

25


30

9. A windscreen wiper device according to claim 6, 7 or 8, wherein said hole(s) has/have a closed circumference.

- 10 A windscreen wiper device according to any of the preceding claims 1 through 9, wherein the oscillating arm has an at least substantially U-shaped cross-section at the location of its connection to said joint part, and
- 5 wherein each leg comprises clamping members which engage rond longitudinal sides of said joint part that face away from each other.

ABSTRACT

A windscreen wiper device comprising an elastic, elongated carrier element, as well as an elongated wiper blade of a flexible material, which can be placed in abutment with a windscreen to be wiped, which wiper blade includes opposing longitudinal grooves on its longitudinal sides, in which grooves spaced-apart longitudinal strips of the carrier element are disposed, wherein neighbouring ends of said longitudinal strips are interconnected by a respective connecting piece, which windscreen wiper device comprises a connecting device for an oscillating arm, wherein said oscillating arm is pivotally connected to said connecting device about a pivot axis near one end, with the interposition of a joint part, with the special feature that said connecting device is positioned at least substantially within said joint part.

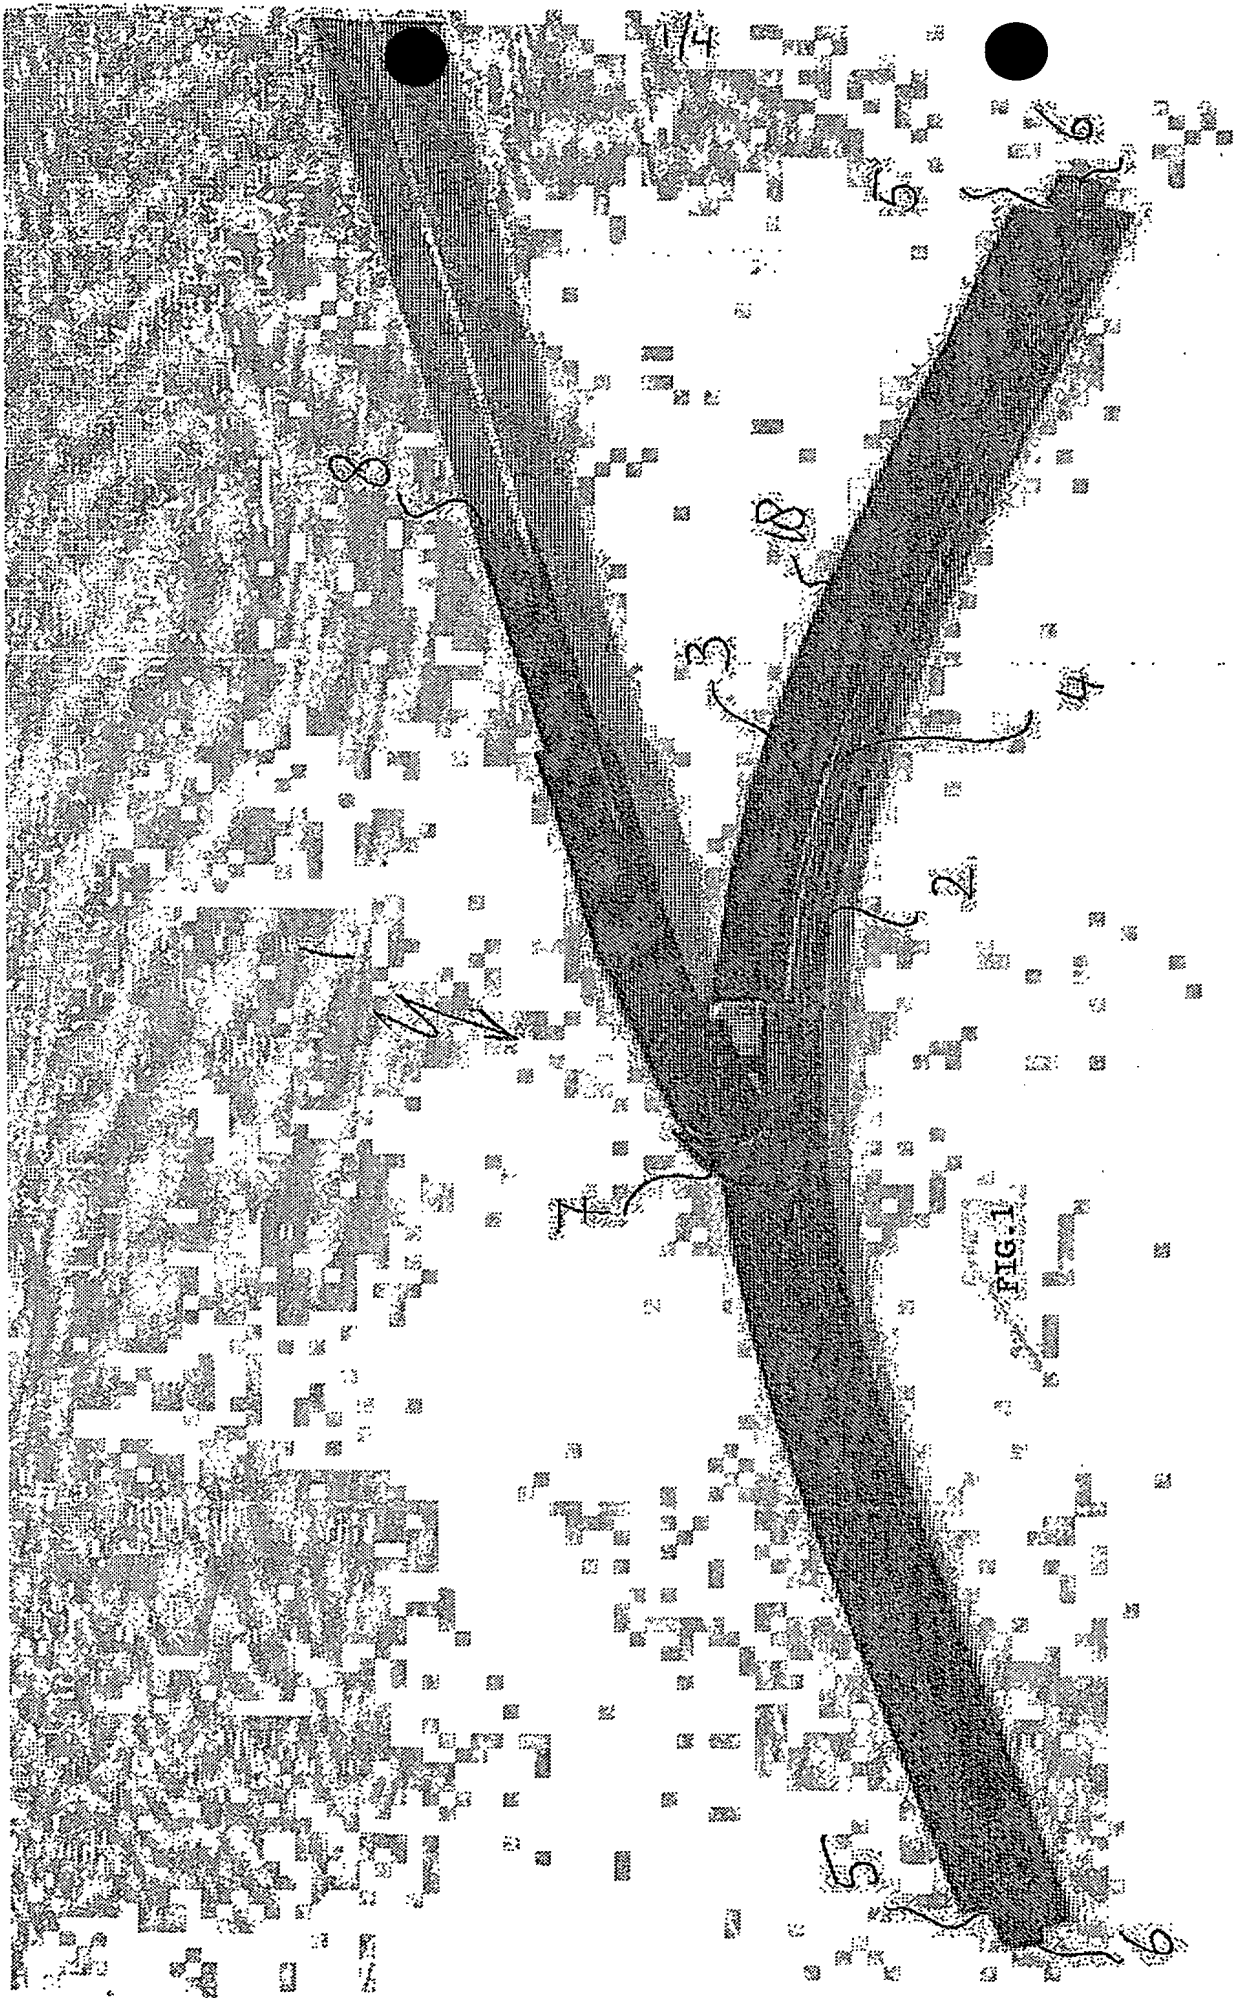

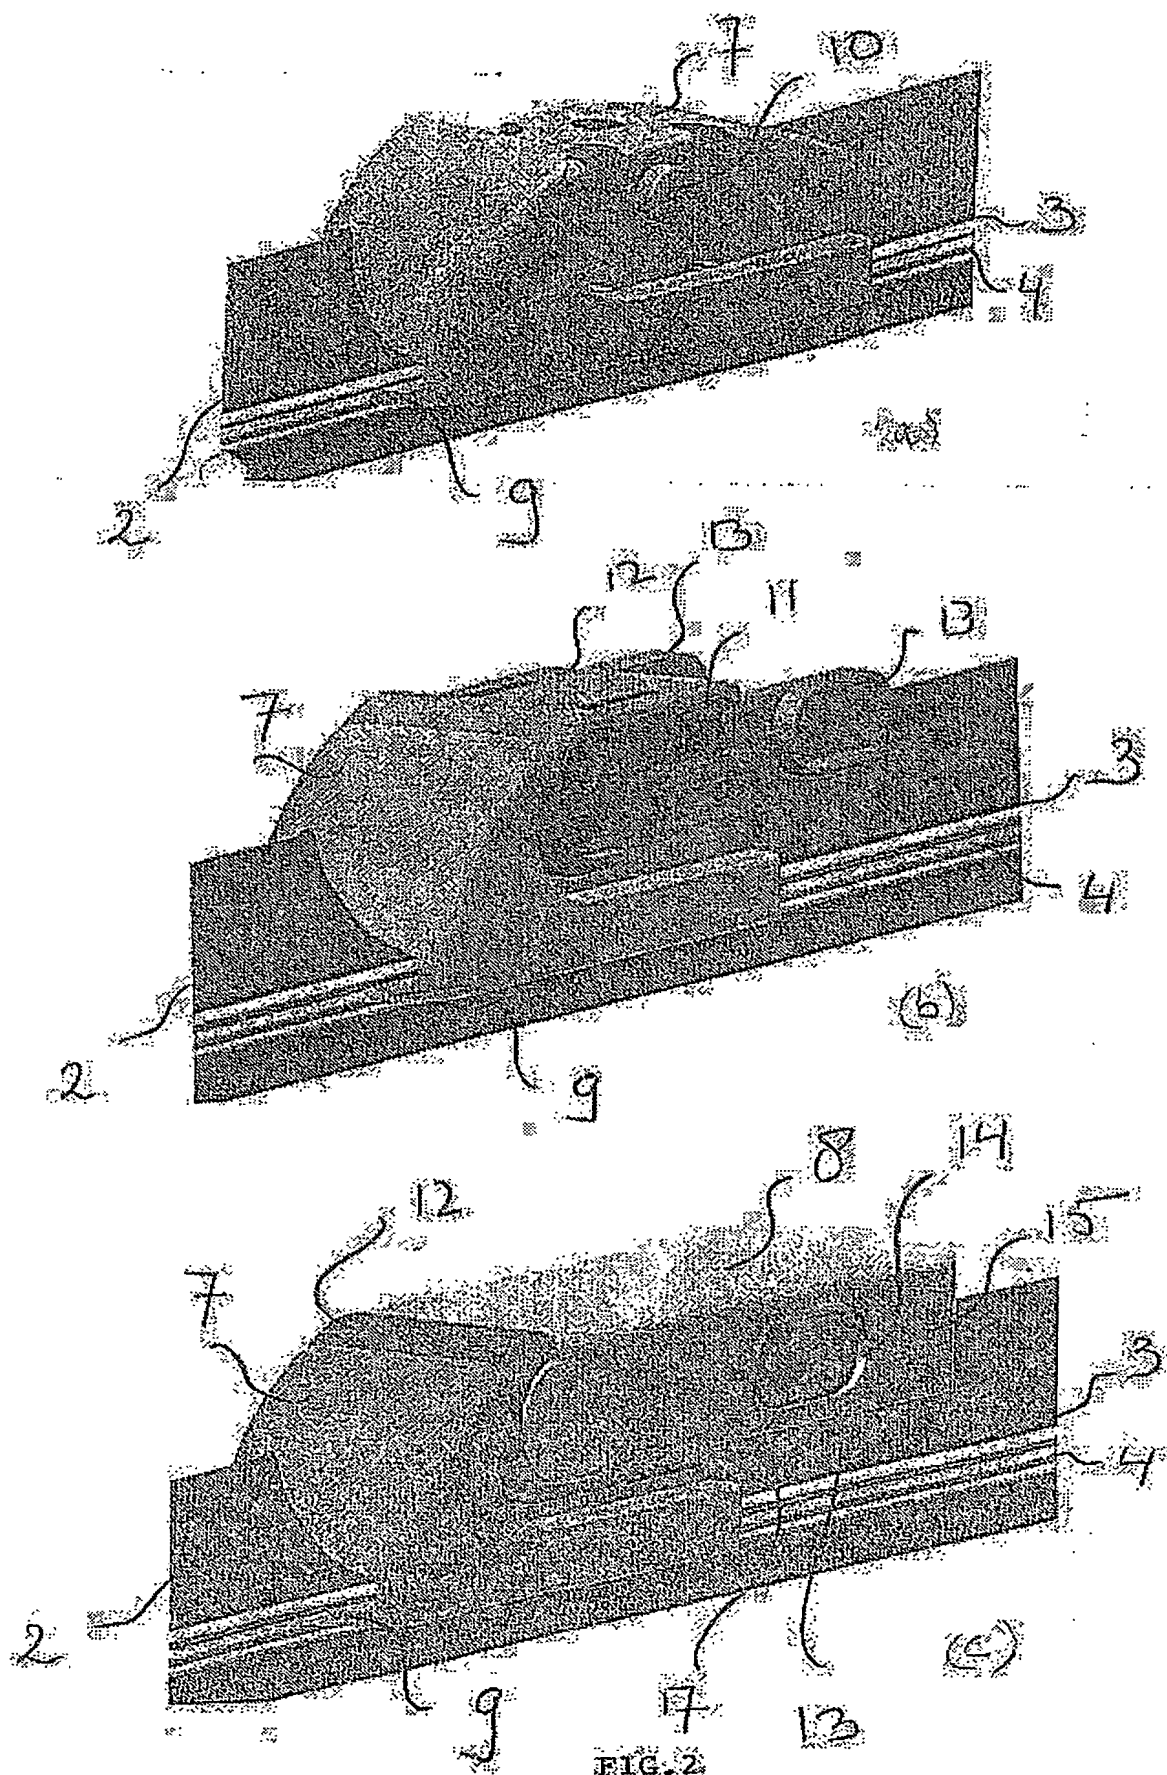


FIG. 2

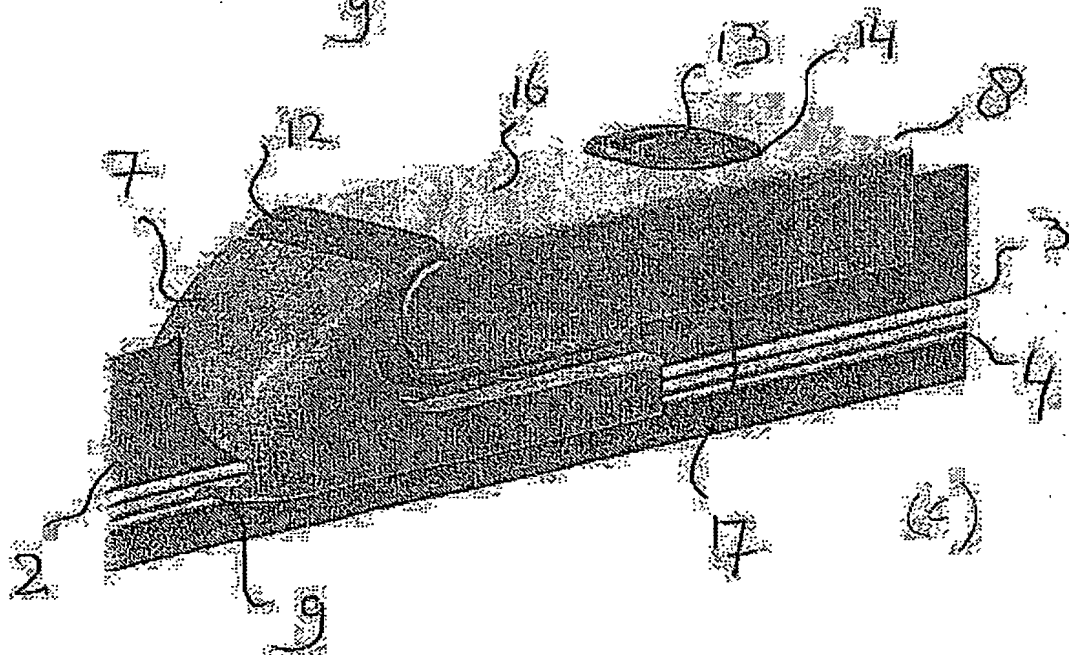
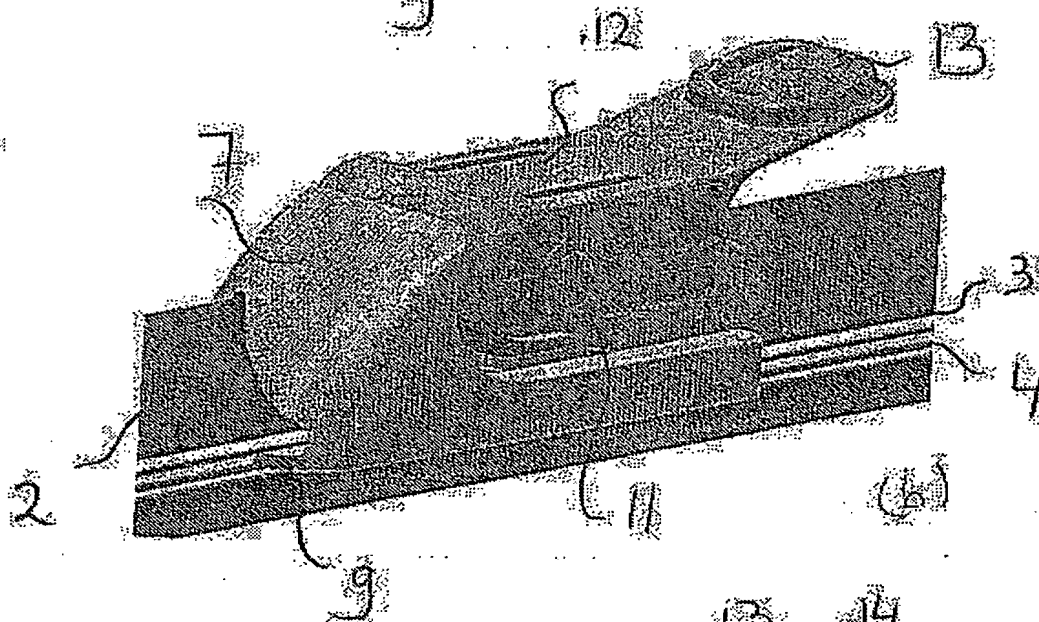
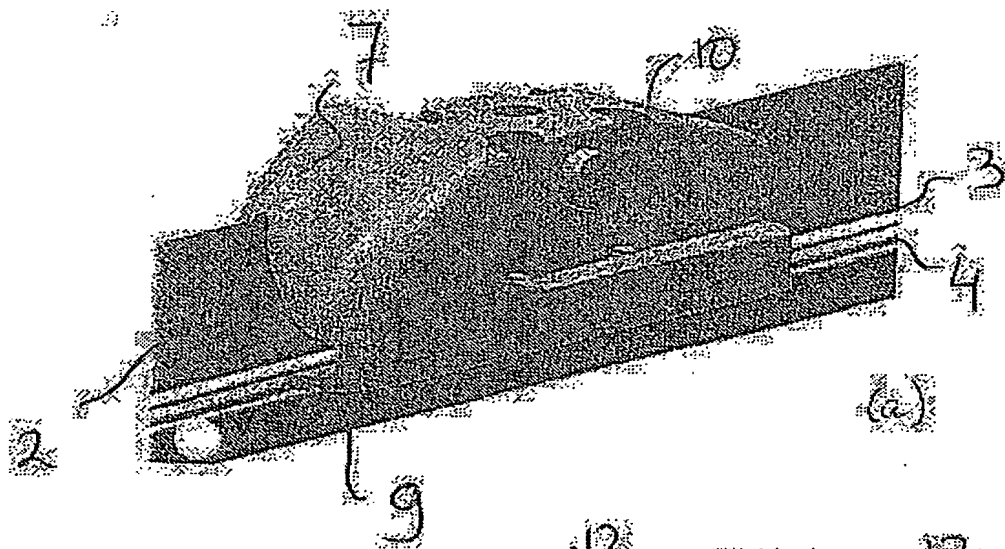


FIG. 3

4/4

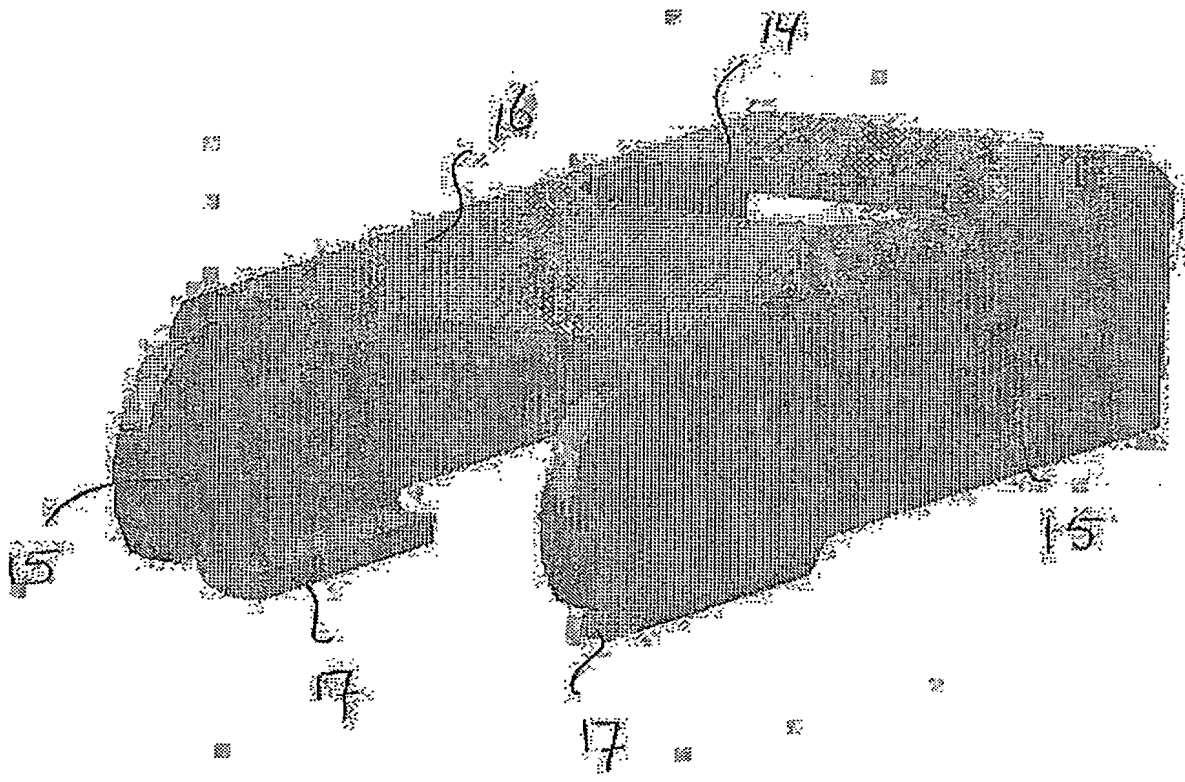


FIG. 4

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.